

# DIGITAL DISPLAY **YOKINS**

The Name That Spells Precision

## DC VOLTMETER

MODEL	Range	Maximum Display	Resolution	Auxiliary
DD-DV100-09	0-100V DC	99.9	0.1V	9V AC/DC
DD-DV500-09	0-500V DC	500	1V	9V AC/DC
DD-DV800-09	0-800V DC	800	1V	9V AC/DC
DD-DV10.60-SP	10-60V DC	60	0.1V	Self Powered
DD-DV30.380-SP	30-380V DC	380	1V	Self Powered



### DD-DV10.60-SP & DD-DV30.380-SP

Accuracies to +/-1%, +/-2LSB  
 Reliable, long life, Micro controller measuring  
 Over Range: Display 'H'  
 Sample Speed: about 10 times/sec  
 LED Size/Color: 3 digit, 0.56", Red  
 Replacement for 2-Wire Analog Meters  
 Dimension: 70\*41mm  
 Mounting Size: 68\*38mm

### DD-DV100-09, DD-DV500-09 & DD-DV800-09

Accuracies to +/-1%, +/-2LSB  
 Reliable, long life, Micro controller measuring  
 Over Range: Display 'H'  
 Sample Speed: about 10 times/sec  
 LED Size/Color: 3 digit, 0.56", Red  
 Dimension: 70\*41mm  
 Mounting Size: 68\*38mm

### (DD-DV10.60-SP & DD-DV30.380-SP)

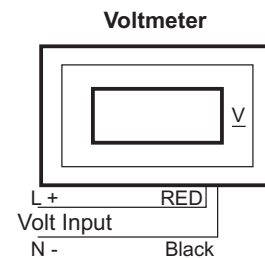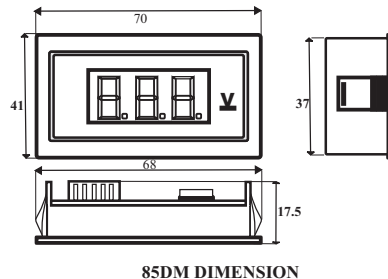

### (DD-DV100-09, DD-DV500-09 & DD-DV800-09)

